


EDDYTHERM®

Professional induction bearing heaters:
Fast, easy and reliable



Why shrink fitting?


Proper shrink fitting extends the life of roller bearings by several times. Nearly half of all reduced bearing life expectancy is due to improper installation. Mechanical methods such as hammers and hydraulic presses risk damaging the inside surface of the inner race and the shaft surfaces. The better shrink fitting solution is via induction heating.

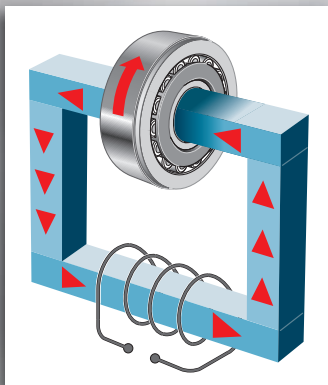

The process

EDDYTHERM® utilizes the induction principle as in transformers – its core and windings can be seen as the primary side, but the workpiece acts as a short-circuited secondary winding, which rapidly heats up due to its great electrical resistance.

This phenomenon allows EDDYTHERM® to control heating by continuously monitoring the workpiece temperature and adjusting its own heating power accordingly. This ensures that the workpiece is heated evenly and the selected temperature is achieved precisely. The crossbar itself remains cool to touch.

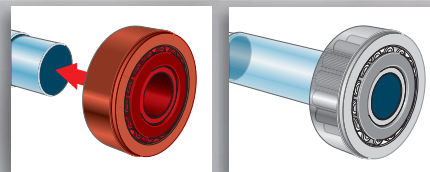

The magnetic flux created around the core induces a current flow in the workpiece and heat is rapidly and equally generated.



Advantages at a glance

Robust industrial design

- ▶ Equipment for workshop use
- ▶ Heavy-duty construction
- ▶ Suitable to use with work gloves

Environmentally friendly

- ▶ Energy saving
- ▶ No smoke, oil vapor or used oil

Safety

- ▶ Automatic error detection
- ▶ Thermal overload protection

Saves bearings

- ▶ No contamination of factory prelubrication
- ▶ Precision ground crossbars reduce vibration, preventing chatter marks on bearings

Demagnetization

All EDDYTHERM® heaters demagnetize workpieces automatically at the end of every heating cycle with no residual magnetism to collect debris.



EDDYTHERM

the logical approach to shrink fitting of bearings, gears, couplings, impellers, crane wheels, rings, sleeves, etc.

EDDYTHERM® Portable

- ▶ Suitable for bearings up to 22 lbs
- ▶ Portable and compact induction heater
- ▶ Magnetic temperature probe up to 356°F included
- ▶ Available options: Voltage from 100-230 V and frequency 50/60 Hz
- ▶ No support crossbar required
- ▶ High frequency technology for outstanding heating performance
- ▶ Predictive temperature control (no overheating)



EDDYTHERM® 2x

- ▶ Suitable for bearings up to 176 lbs
- ▶ Magnetic temperature probe up to 482°F included
- ▶ Available options: Voltage from 110-480 V and frequency 50/60 Hz
- ▶ Swivel arm
- ▶ 3 crossbars of different sizes



EDDYTHERM® 4x

- ▶ Suitable for bearings up to 660 lbs
- ▶ Mobile frame on heavy casters
- ▶ Magnetic temperature probe up to 464°F included
- ▶ Available options: Voltage from 200-600 V and frequency 50/60 Hz



User-oriented, easy operation

- ▶ Temperature and time selection
- ▶ Temperature display in °C or °F
- ▶ Digital display of set and actual value
- ▶ Acoustic signal at the end of heating cycle
- ▶ Dust, oil and water-resistant operator panel
- ▶ Straightforward operation
- ▶ Automatic demagnetizing



Temperature probe

- ▶ Magnetic temperature probe up to 482°F (depending on model)
- ▶ Thermal overload protection



for Portable and 2x models

EDDYTHERM® – technical data



	EDDYTHERM® Portable	EDDYTHERM® 2x	EDDYTHERM® 4x
Voltage ¹⁾	100V-230V ¹⁾ / 50-60Hz	110V-575V ¹⁾ / 50-60Hz	200-600V ¹⁾ / 50-60Hz
Power consumption	max. 1,5 kVA	max. 4,6 kVA	max. 14 kVA
Workpiece max. weight	10 kg / 22 lbs	80 kg / 176 lbs	300 kg / 660 lbs
Workpiece bore diameter	inside > 3/4" / outside < 6 1/4"	inside > 3/4" / outside < 15 3/4"	inside > 3 1/16" / outside < 25"
Thermal overload protection	yes	yes	yes
Temperature control	up to 356°F	up to 482°F	up to 464°F
Temperature accuracy	better than 6°F	better than 6°F	better than 6°F
Time setting	0-10 Min.	0-60 Min.	0-60 Min.
Residual magnetism after heating	< 2 A/cm	< 2 A/cm	< 2 A/cm
Power throttling	yes	yes	yes
Error display	yes	yes	yes
Dimensions (W x D x H)	16 1/2" x 11" x 13 1/2"	16 1/2" x 11" x 16 1/2"	44" x 21 2/3" x 37 4/5"
Distance between posts	-	5 7/10"	10 5/8"
Weight (Standard version)	3,5 kg / 8 lbs	38 kg / 84 lbs	150-174 kg / 330-385 lbs
Standard equipment and optional accessories			
Crossbar for bearing inner diameter			
> φ 15 mm / 5/8"	–	○	–
> φ 20 mm / 3/16"	–	●	–
> φ 30 mm / 1 3/16"	–	○	–
> φ 40 mm / 1 1/2"	–	●	○
> φ 60 mm / 2 1/8"	–	○	○
> φ 80 mm / 3 1/8"	–	●	○
> φ 108 mm / 4 1/4"	–	–	●
Temperature probe, magnetic holder	●	●	●
Temperature probe, clip-type	–	–	○
¹⁾ Indicate voltage when ordering ○ Optional ● Standard equipment			

EDDYTHERM® is a registered trademark of PRÜFTECHNIK Dieter Busch AG. No copying or reproduction of this information, in any form whatsoever, may be undertaken without express written permission of PRÜFTECHNIK Dieter Busch AG. The information contained in this leaflet is subject to change without further notice due to the PRÜFTECHNIK policy of continuous product development. PRÜFTECHNIK products are subject to patents granted or pending throughout the world. ISO 9001:2008 certified. © Copyright 2016 by PRÜFTECHNIK Dieter Busch AG.



**Rotating
Equipment
Consultants**

200 West 34th Avenue, Suite 1017
Anchorage, Alaska 99503
Phone 907-522-2411 • Fax 907-522-2412
www.terntech.com



PRÜFTECHNIK Condition Monitoring
GmbH Oskar-Messter-Str. 19-21
85737 Ismaning, Germany
Tel.: +49 89 99616-0
Fax: +49 89 99616-200
info@pruftechnik.com
www.pruftechnik.com
A member of the PRÜFTECHNIK group